THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES IS STRICTLY PROHIBITED.



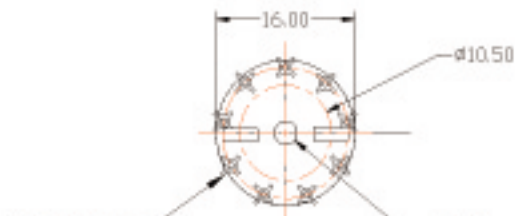



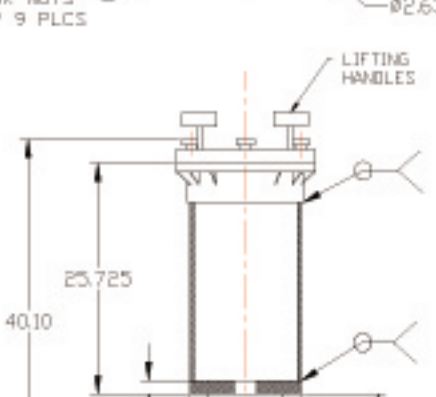

NOTES:

1.0 THE FILTER HOUSING IS CONSTRUCTED OF NATURAL POLYPROPYLENE.
2.0 THE DESIGN PRESSURE IS 45 PSI @ 70 F.
3.0 ALL FASTNERS FOR THE VESSEL COVER & LEGS ARE 316L STAINLESS STEEL.
4.0 THE VESSEL COVER BOLTS ARE ½ - 13 UNC X 3½" LONG, TYP 3 PLACES.
5.0 THE INSERTS EXIST ON THE SHELL FLANGE TO HAVE 9 BOLTS & STAR NUTS FOR THE VESSEL COVER.
6.0 THE SHELL FLANGE HAS AN O-RING GROOVE WHICH PERMITS SEALING THE FILTER VESSEL.
7.0 THE BOTTOM VESSEL CAP & SHELL FLANGE IS WELDED IN PLACE.
8.0 PVDF MATERIAL IS AVAILABLE.

DESIGNED TO ACCEPT 32-CELL
DEPTH CLEAR "D" STACK

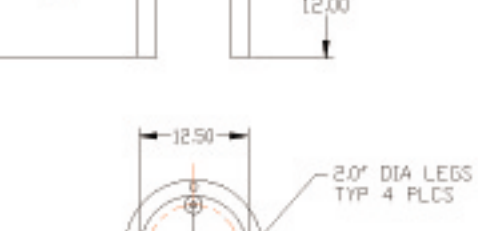

PURO-LATOR ADVANCED FILTRATION

32 CELL, TOTE

01-0214